


aune How to Change the Op-amp of the X8

The aune X8's op-amp is interchangeable (dual op-amp only). Here are some tips for changing the op-amp: When removing the op-amp, in order to prevent the pins from damage, please use the extraction tool in the package.

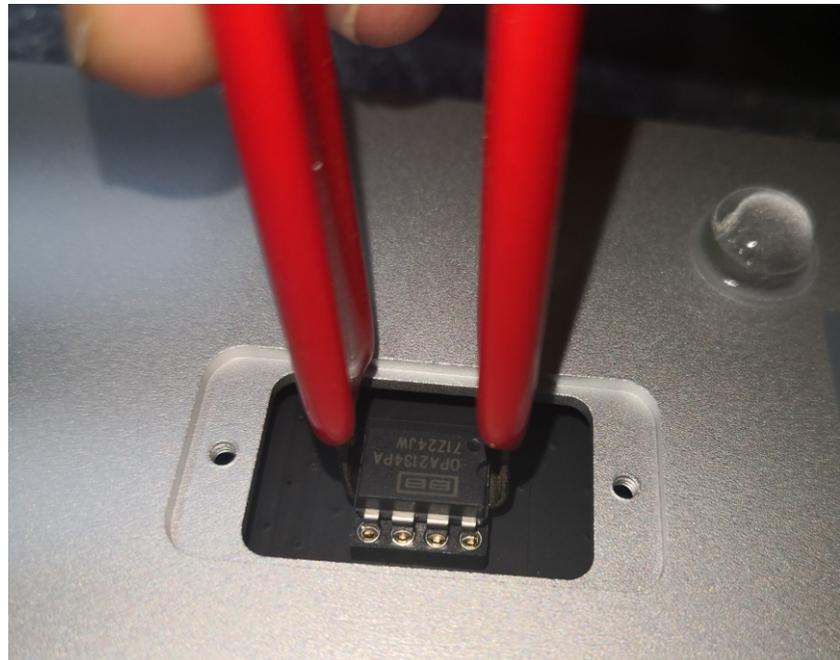

aune


Please pay attention to the op-amp's direction. There's a notch or a dot on a side.



Notch


aune

The following pictures show four of the recommended op-amps having been inserted in the X8.

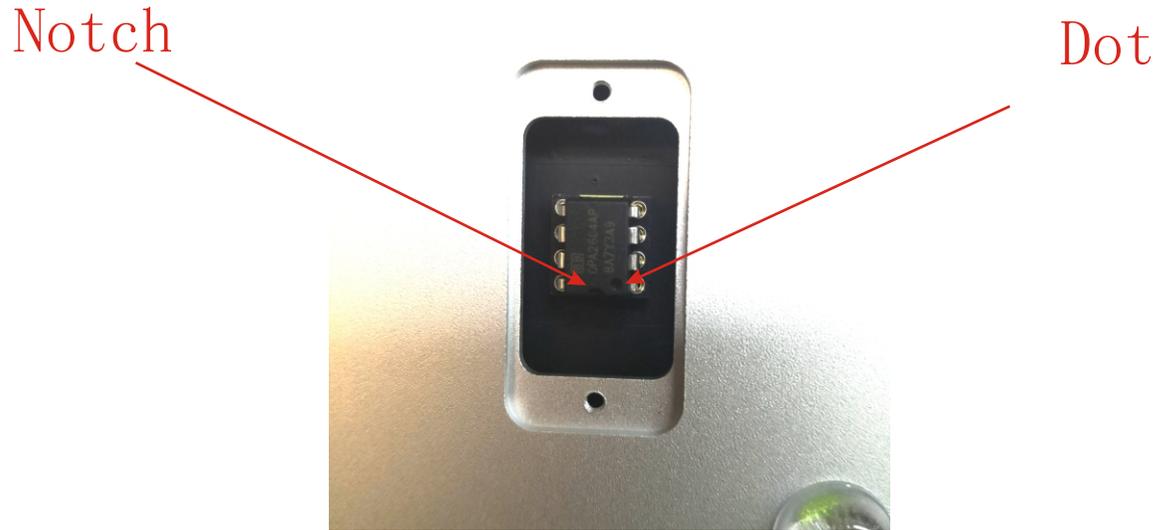

Make sure the notch and dot of the OPA2604 are on the same side with the notch of the socket.

aune

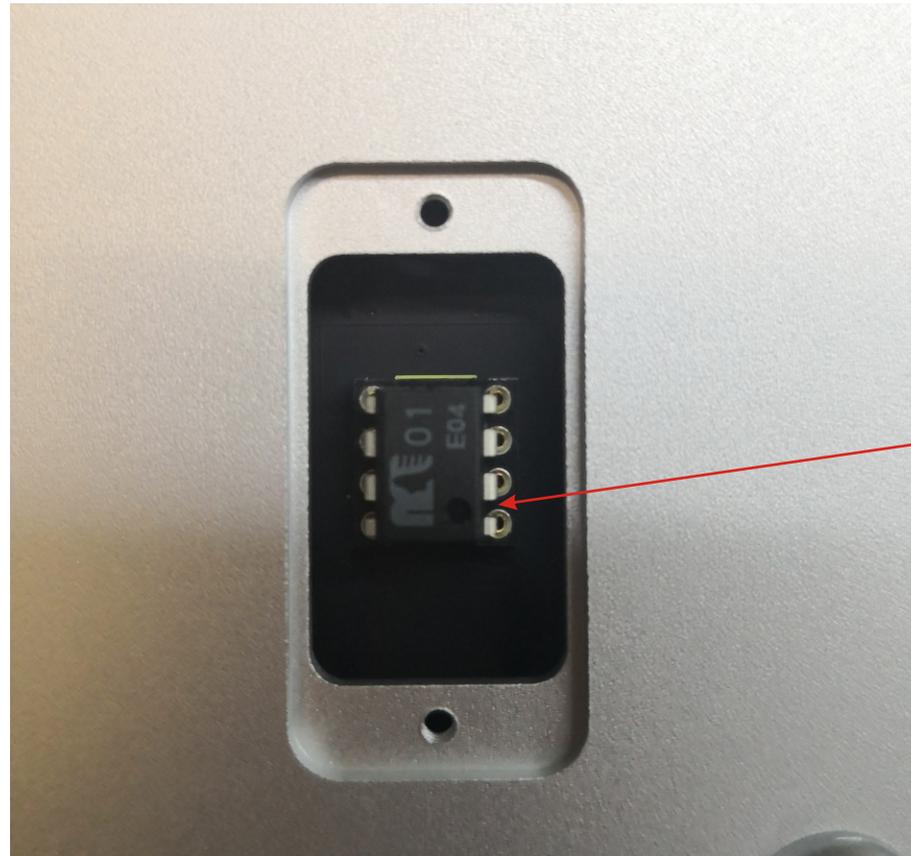


Dot

Make sure the dot of the MUSES01 are on the same side with the notch of the socket.


avne

Dot

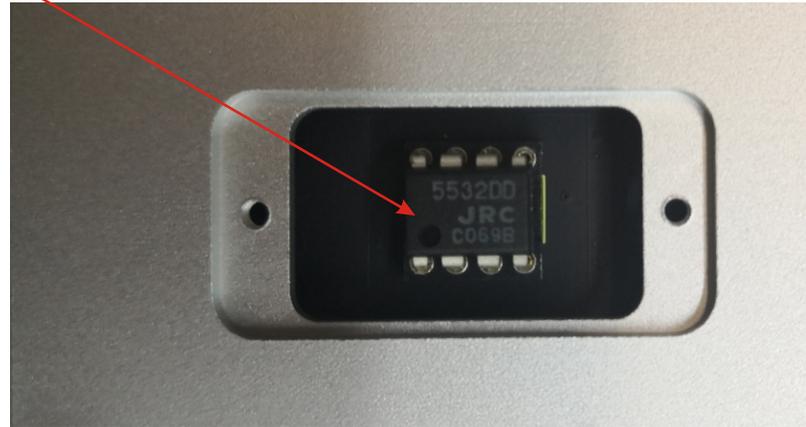

Make sure the dot of the NJM5532 are on the same side with the notch of the socket.

auNE

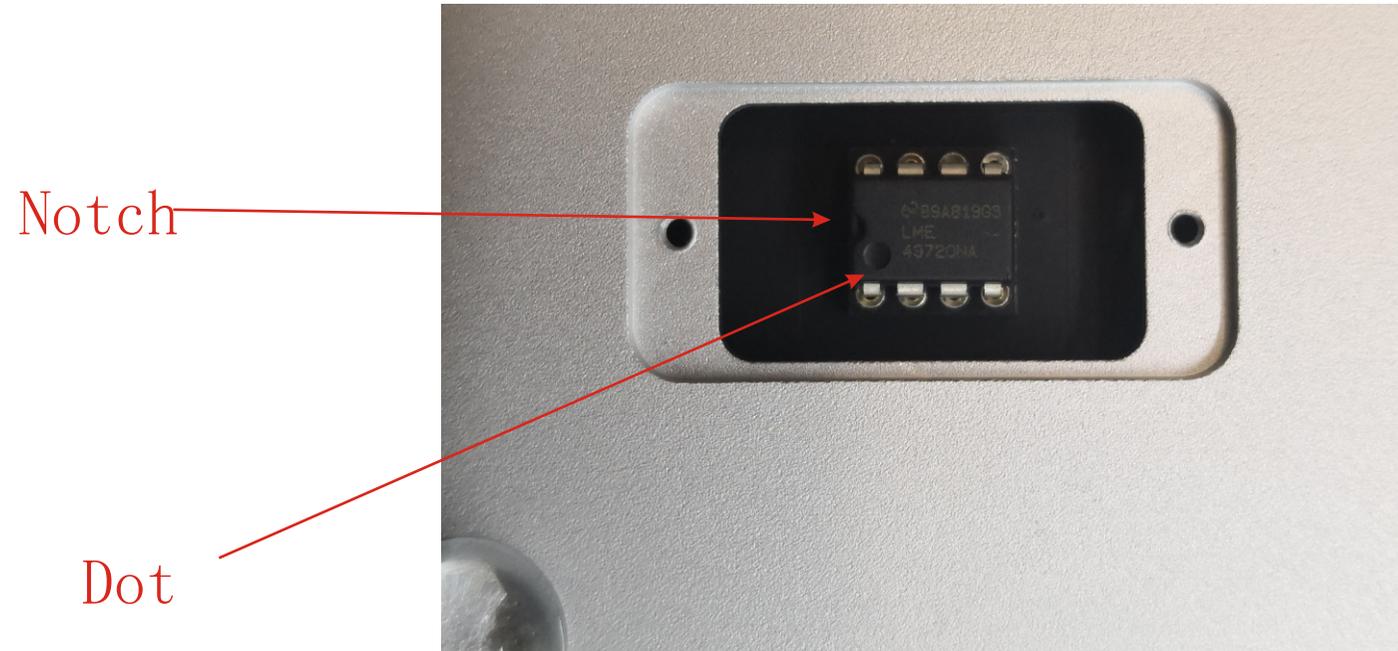

Make sure the notch and dot of the LME49720 are on the same side with the notch of the socket.